


Family Owned
& Operated




**FRIDGE SEAL
NEWCASTLE**
QUALITY COMMERCIAL & DOMESTIC FRIDGE SEALS

30 Years
Experience

Instructions for fitting 'Bead Style' fridge door seals

- Before removing old seal place new seal against old seal to ensure right size
- Observe how old seal is attached. Most seals are secured by self tapping screws. Loosen screws only (do not remove screws) and remove old seal
- Fit new seal and only finger tighten screws
- Tighten screws tightly on hinge side of door
- A fine smear of Vaseline on surface of seal down the hinge side will help to prevent the seal from twisting over
- Close door and ensure door is closing parallel with cabinet
- If door is not closing parallel with the cabinet it can be easily straightened whilst the screws are only finger tight
- Once you have the door closing properly, tighten screws completely on other three sides

Cross Section

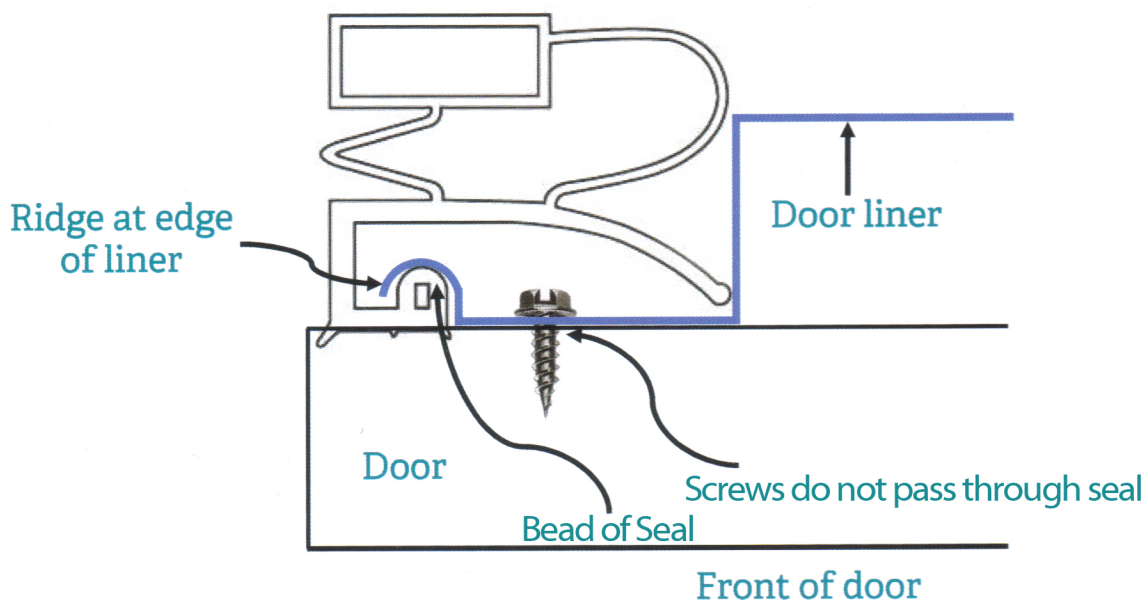

65 Bruncker Road
Broadmeadow NSW 2292
Phone (02) 4962 1970
Fax: (02) 4962 1933
www.fridgeseal.com.au