


Family Owned
& Operated

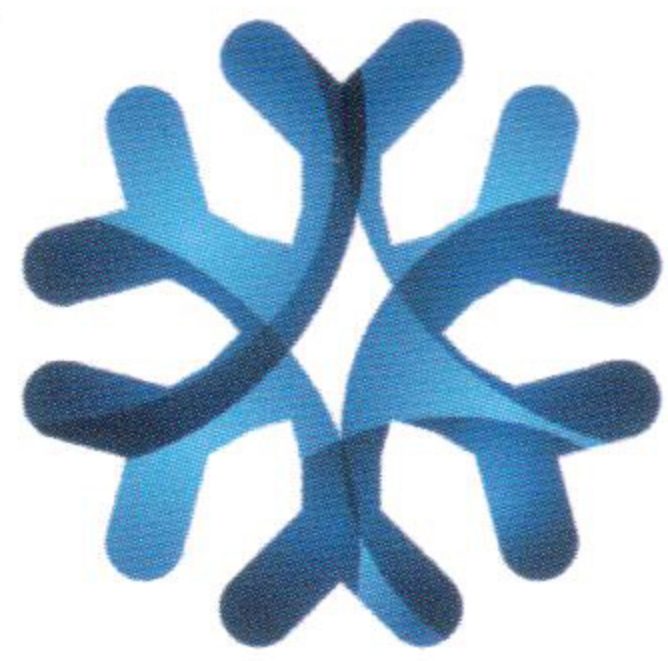

**FRIDGE SEAL
NEWCASTLE**
QUALITY COMMERCIAL & DOMESTIC FRIDGE SEALS

30 Years
Experience

Instructions for fitting LG press in type seals

Before removing old seal place new seal against old seal to ensure right size


The back of the seal is slotted into a groove on the fridge door. The old seal should pull straight out of the groove

Fit the new seal by pressing the seal into the groove. Do this by applying pressure to the front of the seal against the door

A fine smear of Vaseline on the surface of the seal down the hinge side will help to prevent the seal from twisting over

Feel free to call us on (02) 4962 1970 if you have any questions

Cross section of seal

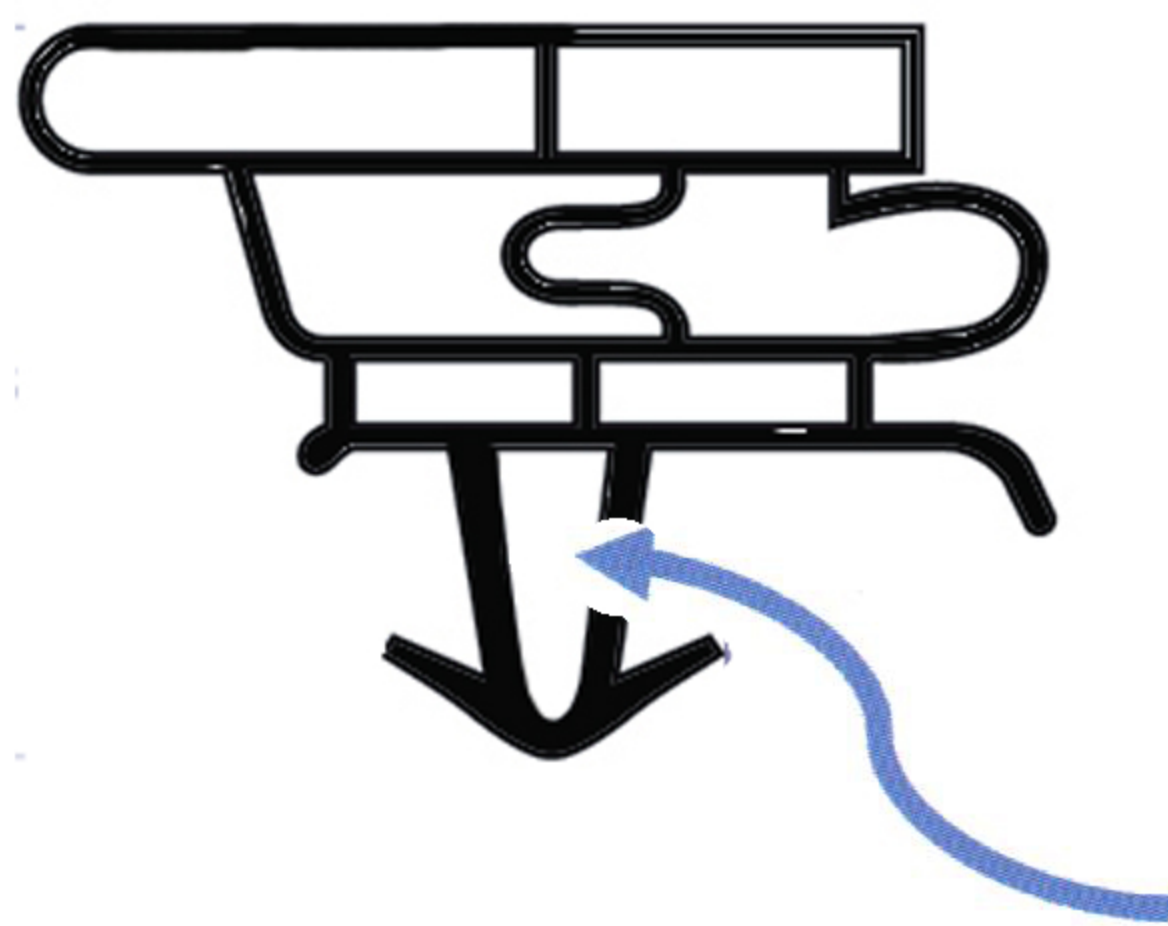

Arrow head that presses
into slot around door

65 Brunner Road
Broadmeadow NSW 2292
Phone (02) 4962 1970
Fax: (02) 4962 1933
www.fridgeseal.com.au